
HARNESSED USB 3.0 CABLES





www.sab-cables com

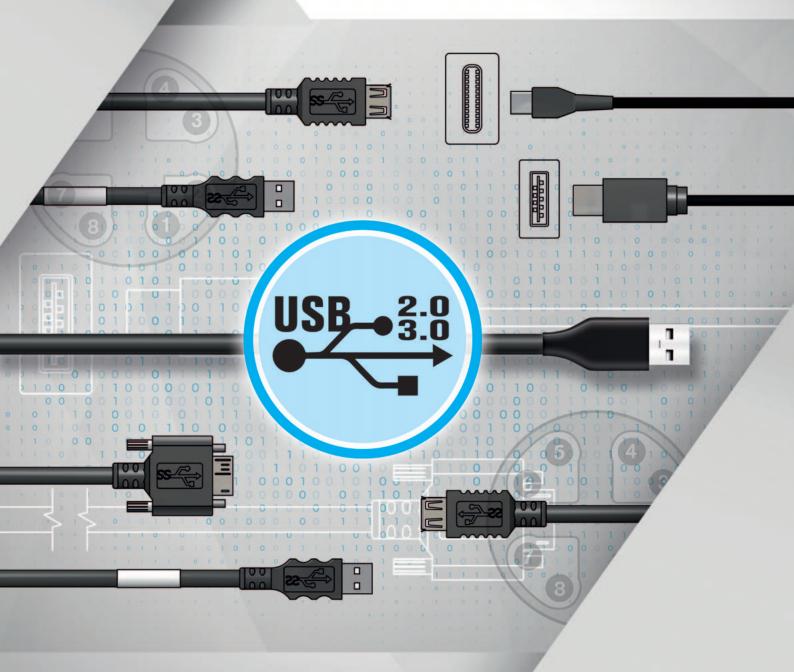

ENTREPRISE FAMILIALE TRADITIONNELLE DEPUIS 1947



Family business in the third generation

 $75 \ \text{ years of experience in cable and wire manufacturing as well as in temperature measurement technology turned a one$ man business into a company with more than 550 employees. We prove our strength every year with more than 1500special products according to customers' requirements. Each product is a new challenge for our creative technical team. We atSAB see ourselves as a manufacturer and a service provider – in the sense of true partnership and the greatest possible customerorientation.

Today, the quality of our products is known and appreciated in more than 100 countries around the world. In all product ranges, we are certified according to DIN EN ISO 9001. Furthermore, we have implemented an environmental management system for our company according to DIN EN ISO 14001, an occupational health and safety management system according to NLF/ILO-OSH and DIN ISO 45001, and an energy management system according to DIN EN ISO 50001.

And also for the future, our slogan is: "WE GO FORWARD!"

FOUNDED:	1947 by Peter Bröckskes sen. an independent, medium-sized company.
CEO:	Peter Bröckskes and Sabine Bröckskes-Wetten
PLANT/LOCATION:	In Viersen (Lower Rhine) 110.000 m ² company site.
	Own manufacturing from copper conductor to outer sheath.
	VDE approved burnchamber and laboratory within the company.
EMPLOYEES/WORKERS:	approx. 430 at the plant in Viersen, 550 worldwide
YEARLY SALES:	over 134 Mio. € worldwide
PRODUCTS:	Special Cables
	Measurement Technology
	Cable Harnessing
CERTIFICATES AND APPROVALS: DNV ABS DSI.	Ouality management system acc. to DIN EN ISO 9001 for every manufacturing field Environmental management system acc. to DIN EN ISO 14001 Occupational health and safety management acc. to NLF/ILO-OSH and DIN ISO 45001 Energy management system acc. to DIN EN ISO 50001



Production possibilities

Flexible cables and wires "Made in Germany"

As a leading manufacturer we develop and produce cables for industrial purposes.

Our great variety of materials offer a wide range of possibilities to manufacture your requested product.

The following survey shows an extract from our production range:

Conductor Materials:

- bare copper
- tinned copper
- silver plated copper
- nickel plated copper nickel
- compensating cable alloys

Insulation and Jacketing Materials:

Temperature Ranges:

SABIX*

Besilen[®]

Fibreglass ✓+600°C

Thermoplastic Elastomers

✓-50°C up to +145°C

✓-50°C up to +220°C

✓-40°C up to +220°C

✓-90°C up to +260°C

CABLE HARNESSING

FEP, ETFE, PFA

- PVC
- Polyethylene
- Polypropylene
- Polyurethane
- / TPE
- SABIX[®] (zero halogen)
- Besilen[®] Silicone
- FEP, ETFE, PFA, PTFE
- Fibreglass

Conductors:

- cross sections 0,055 300mm²
- unshielded up to 125 conductors
- shielded up to 100 conductors

Cable harnessing directly from the manufacturer SAB:

As a full service partner we are also able to offer cable harnessing acc. to the customers request besides the development and manufacturing of cables. Please trust our long-term experience in the processing of cables and plugs.

- harnessing acc. to customer's requirements
- complete cable harness
- UL certified assemblies
- HV measurement harnessing

Measuring technique for industrial purpose

Manufacturer of temperature sensors for industrial applications with 75 years of experience!

- Mineral insulated thermocouples
 - Mineral insulated resistance thermometers
- Temperature sensors
- Mobile high voltage temperature measurement technique
- Temperature sensors for automobile testing






SPECIAL

USB 3.0 CABLE WITH MOULDED CONNECTOR


USB 3.0 cable with moulded type A and Micro-B male connector



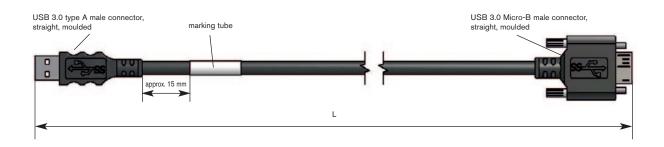

Application:

Connection cable PC – 3D camera



	Construction:	3x(2x30AWG)ST+2x24AWG
	Insulation:	SABIX®
	Outer sheath:	PUR
	Outer diameter:	approx. 6,1 mm
:	Min. bending radius:	10 x d
	Peak operating	

max. 350 V

voltage:

Configuration example:

item no.	length "L" in cm
S0604-4004-00100	100
S0604-4004-00200	200
S0604-4004-00300	300
S0604-4004-00500	500

	Connector:
side 1:	USB 3.0 type A male connector
side 2:	USB 3.0 type Micro-B male connector

Cable data:


SAB marking:

item number, order number, length



USB 3.0 CABLE WITH MOULDED CONNECTOR

USB 3.0 cable with moulded type A male connector and type A female connector

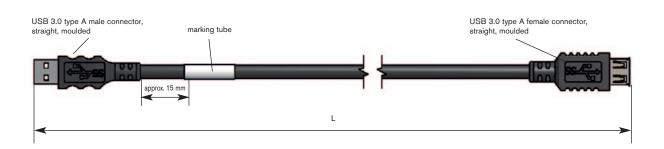

Application:

Extension cable

	Cable characteristics:
• :	mechanically very rugged PUR cable suitable for cable tracks

	Cable data:
Construction:	3x(2x30AWG)ST+2x24AWG
Insulation:	SABIX®
Outer sheath:	PUR
Outer diameter:	approx. 6,1 mm
Min. bending radius:	10 x d
Peak operating voltage:	max. 350 V

CSR 0015

Configuration example:

item no.	length "L" in cm
S0604-4005-00050	50
S0604-4005-00100	100
S0604-4005-00200	200
S0604-4005-00300	300
S0604-4005-00500	500

	Connector:
side 1:	USB 3.0 type A male connector
side 2:	USB 3.0 type A female connector

SAB marking:


item number, order number, length



USB 3.0 CABLES


USB 3.0 CABLE WITH HAND-ASSEMBLED CONNECTORS

USB 3.0 cable with hand-assembled type A connector and type C connector

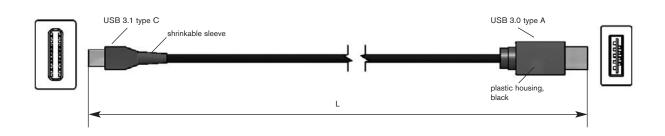

Application:

Connection cable USB A with USB C connector



Cable characteristics:

	Cable data:
Construction:	3x(2x30AWG)ST+2x24AWG
Insulation:	SABIX®
Outer sheath:	PUR
Outer diameter:	approx. 6,1 mm
Min. bending radius:	10 x d
Peak operating voltage:	max. 350 V

Configuration example:

item no.	length "L" in cm
S0604-4009-00100	100
S0604-4009-00200	200
S0604-4009-00300	300
S0604-4009-00500	500

	Connector:
side 1:	USB 3.0 type A connector (hand-assembled)
side 2:	USB 3.1 type C connector (hand-assembled)

SAB marking:

item number, order number, length



CSR Dou's





26, la Rue des Caillottes ZI Plaine des Isles 89006 Auxerre Cedex FRANCE

Tél.: +33 3 869 466 94 Fax: +33 3 869 466 50 info@sab-cables.com www.sab-cables.com 3 rue de la Lagune Parc d'Activités de Viais 44860 Pont Saint Martin FRANCE Tél.: +33 2 518 976 76 Fax: +33 2 518 900 21 info@sab-cables.com www.sab-cables.com